



Armstrong®
FLOORING



SLIP-RETARDANT FLOORING

SAFETY ZONE™

Sheet & Tile

Enhanced Traction for an Added Measure of Safety

Healthcare, education, and retail facilities have an extraordinary responsibility to protect the health and well-being of occupants with an environment that is clean, comfortable, and safe. Safety Zone™ Sheet and Tile Flooring is designed with this in mind, providing enhanced traction for an added measure of safety where it matters most.

Limited Warranty

5 YEAR

Commercial Warranty when installed in accordance with the recommended Armstrong® Flooring adhesive and detailed instructions at ArmstrongFlooring.com.

+10 YEAR

of overall warranty coverage by using any Strong System™ subfloor preparation product.



Safety Zone™ Sheet
5A256 spice white; 5A291 mallee wheat; 5A261 ironbark



How It Works

Safety Zone™ Sheet

features an embossed surface made with aluminum oxide particles that are encapsulated in a polyurethane finish for enhanced traction and easy maintenance. Safety Zone Sheet can provide an added measure of safety in a multitude of spaces, including wet barefoot areas up to 150 square feet. It's ideal for lavatories, locker rooms, wet physical therapy spaces, and more.

- No sealing, buffing, stripping, polishing, or restorative maintenance needed. Polish should not be used.
- Unique through-traction, -pattern and -color wear layer for consistent appearance and performance for the life of the floor.
- Available in 12 on-trend colors that coordinate across the Armstrong Flooring portfolio.

Safety Zone™ Tile

is made with an embossed surface embedded with proprietary particles for exceptional slip-retardant performance, with colors and patterns that provide hiding power against scuffs, scratches, and abrasion. No specialized maintenance required; follow traditional VCT maintenance protocols including the application of polish and periodic restorative maintenance.


- Fast Start® Factory Finish protects the tile during installation and makes initial maintenance quick and easy.
- Features through-pattern wear layer for lasting performance, even under heavy traffic conditions.
- Available in 12" x 12" format for modular flexibility.



Safety Zone™ Sheet
5A291 mallee wheat

SLIP-RETARDANT FLOORING
Safety Zone™ Sheet

WS: Coordinating
 Solid Weld Rod

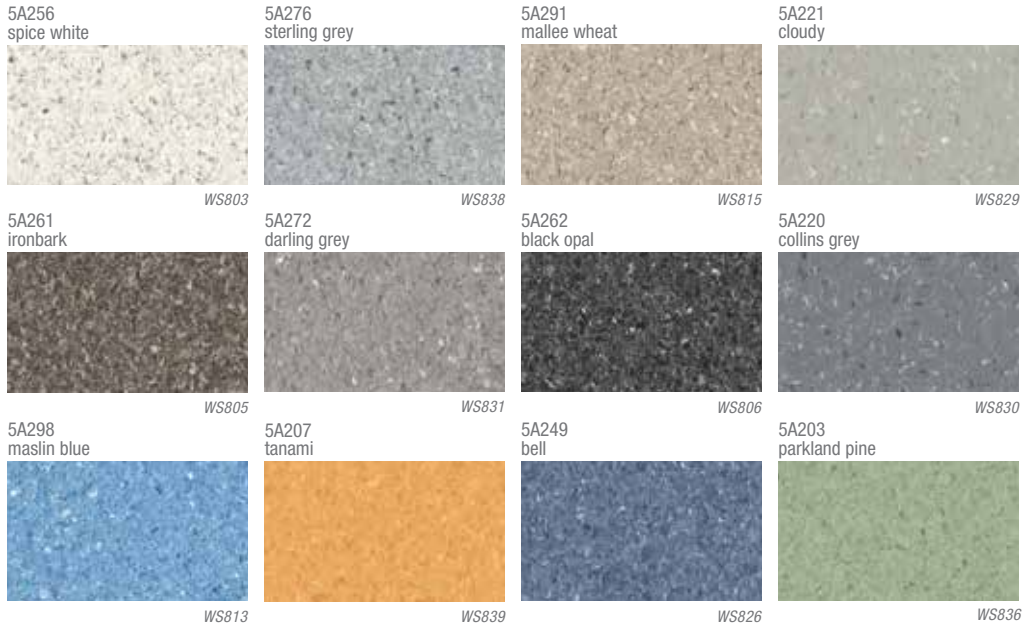

SLIP-RETARDANT FLOORING
Safety Zone™ Tile



5A276 sterling grey, 5A249 bell, 5A298 maslin blue
Safety Zone™ Sheet

ArmstrongFlooring.com/commercial | 1 888 276 7876



FP7440F10250-919
 © 2019 AFI Licensing LLC
 Armstrong[®] and Armstrong Logo are trademarks of AFI Licensing LLC.
 FloorScore[®] is a registered trademark of the Resilient Floor Covering Institute.
 All other marks are trademarks of Armstrong Flooring, Inc., or its subsidiaries.

Colors pictured in this brochure are as accurate as possible but may not be identical to the actual product.
 For true color representation, order product samples before specifying.