

ARR051 Natural Clay



Rest & Refuge[™]
Rigid Core Flooring



Warm & Welcoming

In a hyper-connected world, create an opportunity to escape with Rest & Refuge™. The natural details of authentic wood designs embrace a warmer approach to minimalism and mindful simplicity. Rest & Refuge transforms hospitality and specialty retail spaces for a welcoming guest experience.



ARR01 | Oasis



ARR01 Oasis



ARR08 Cliffside



ARR02 Shale



ARR09 Earthtone




ARR03 Basalt



ARR10 Haven



ARR04 Woodland



ARR11 Toasted Ivory



ARR05 Natural Clay



ARR12 Rose Gold




ARR06 Sparrow



ARR13 Café



ARR07 Sedona




ARR14 Storm Chaser



Rest Assured

We share your commitment to transparency and building a better environment together.

- Low VOC emissions and FloorScore® certified
- Free of ortho-phthalates and heavy metals
- Health Product Declaration (HPD) and third-party certified Environmental Product Declaration (EPD) available

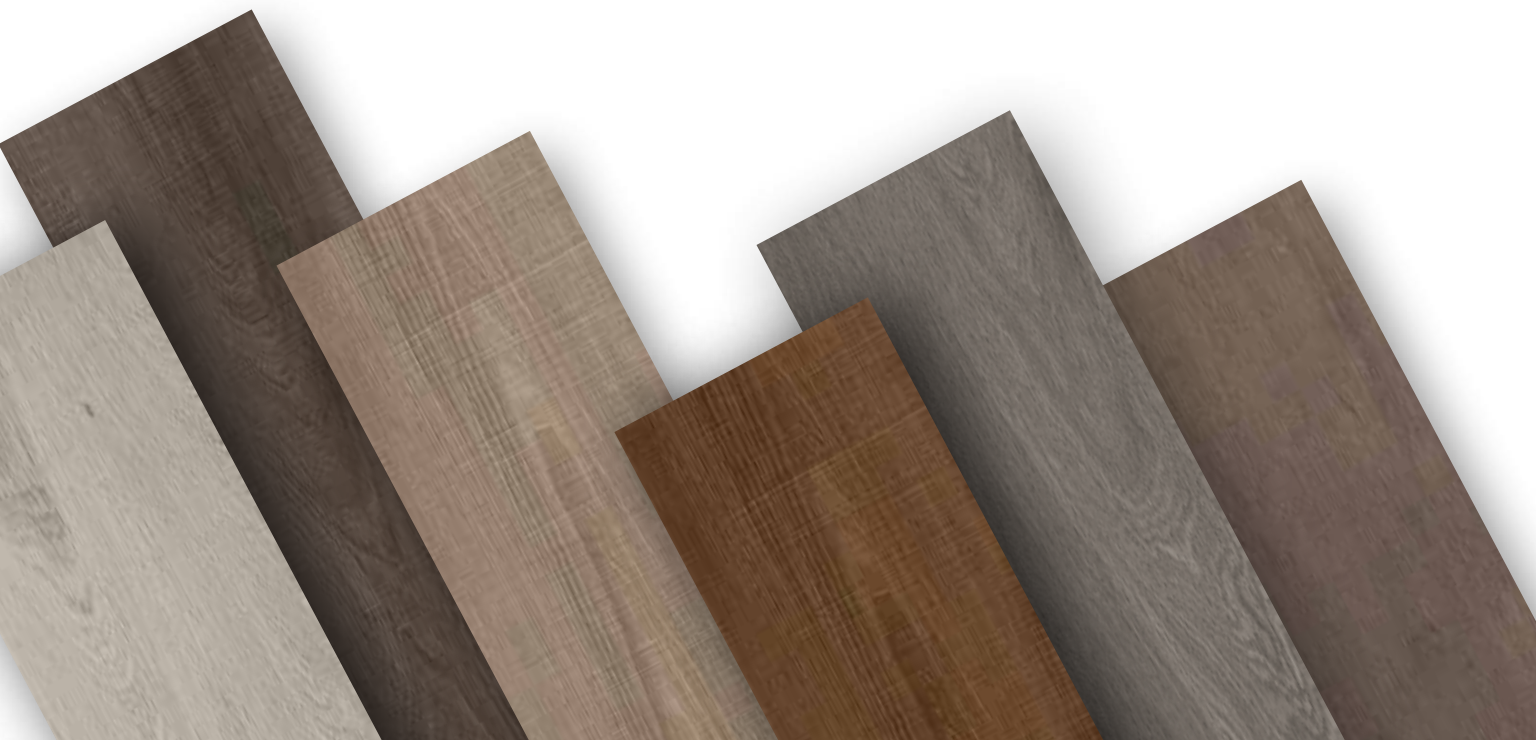



Durable for Business. Beautiful for Guests.

Rest & Refuge was engineered to offer sound blocking benefits. Its ultra-dense core with an attached pad – for single product acoustic performance – helps to block airborne and structure-borne sound.


The top-down 100% waterproof structure also reduces subfloor prep, hides minor subfloor imperfections, and does not need to be acclimated in most spaces for ease of installation.

Rest & Refuge features Diamond 10 Technology for category-leading scratch, stain, and scuff resistance. Together with the solid polymer core for impressive dent resistance, floors will look beautiful for years to come.





ARR02 | Shale

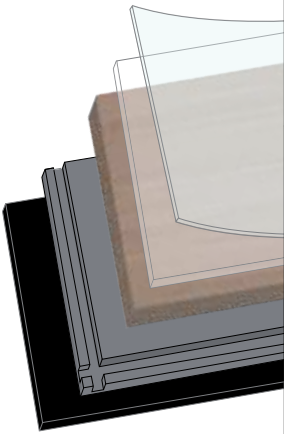

- 1. Diamond 10[®] Technology**
Patented innovation that uses cultured diamonds to provide category-leading scratch, stain, and scuff resistance from edge-to-edge
- 2. 20 mil Wear Layer**
For durability and abrasion resistance
- 3. Realistic Printed Visual**
- 4. Dense Polymer Waterproof Core**
For impressive dent resistance
- 5. Acoustic IXPE Backing**
Attached pad provides single product acoustic performance, helping to block airborne and structure-borne sound

20 Year Commercial Limited Warranty

Supported by a 20 Year Commercial Limited Warranty. Add 10 years of overall warranty coverage by using Strong System™ subfloor preparation products. Visit ArmstrongFlooring.com for more information.



Product Information

Construction - Rigid Core

International Specifications - ASTM F 3261, Class I,
Type B, Grade 1, Backing Class B

Overall Thickness - 6.5 mm / 0.25 in.

Wear Layer Thickness - 20 mil / 0.020 in.

Size - 8.85 in. x 60 in.

Factory Finish - Diamond 10® Technology

Installation - Floating

Maintenance Options - No Polish – No Buff, Polish Optional

Acoustics - ASTM E492 (IIC) - 57 on 8" concrete (no ceiling)

ASTM E90 (STC) - 53 on 8" concrete (no ceiling)

ASTM E2179 (DELTA IIC) - 23

Color and visual variation is inherent in all resilient products. Prior to installation, we recommend reviewing multiple tiles.

ArmstrongFlooring™

Walk On. Walk Strong.™



Visit [ArmstrongFlooring.com](https://www.armstrongflooring.com)

for complete Product, Technical,
Adhesives, Installation and
Maintenance recommendations.

Print#: FP744010588-421

Printed in USA. | Armstrong and the Armstrong logo are under license from AWI Licensing LLC. | All other trademarks are owned by AFI Licensing LLC. | © 2021 AFI Licensing LLC. FloorScore® is a registered trademark of the Resilient Floor Covering Institute.