



Medintone[™] | Medintech[®] Homogeneous Sheet




Proven Performance for Healthy Environments


Medintone[™] and Medintech[®] collections are engineered for spaces demanding superior infection control, helping to protect the health and well-being of occupants in healing and learning environments.

The durability and cleanability of Medintone and Medintech work in harmony with a color palette inspired by nature. From calming blues and greens, to soothing neutrals and golden tones inspired by a sunset, Medintone and Medintech offer boundless opportunities for design that encourages comfort, happiness, and healing.



Medintech® offers a calming color palette in reimagined neutrals. To add visual interest, its uniform construction features contrasting chip colors for depth and movement.

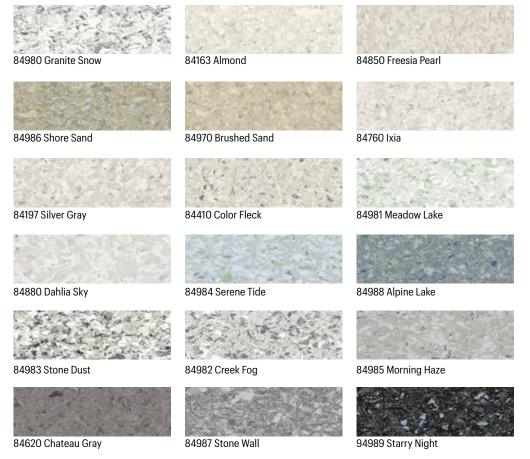

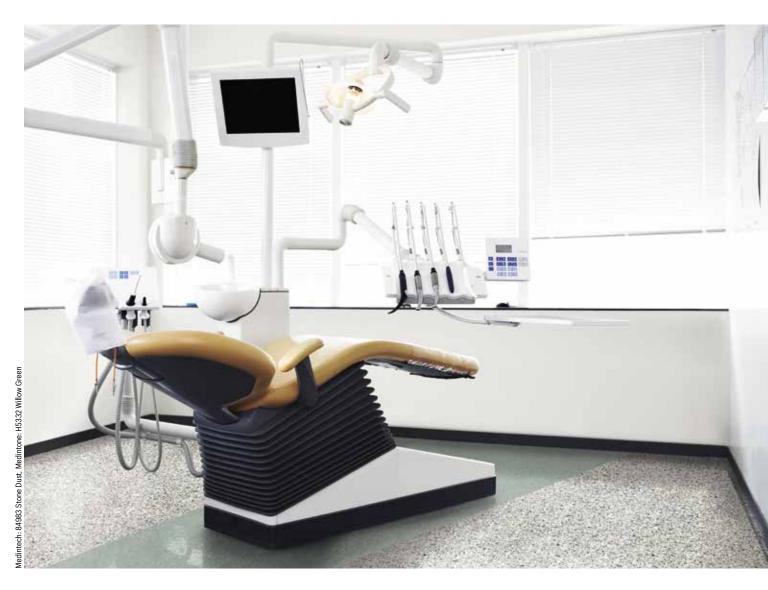


Building Better

We share your commitment to transparency and building a better environment together.

- Low VOC emissions and FloorScore® certified
- Free of Ortho-phthalates and heavy metals meets Well Building Standard® Toxic Material Reduction Credit requirements
- Recyclable through the On&On® Recycling Program contributes to LEED® credits; reduces both environmental impacts through landfill diversion and the cost of waste disposal
- Health Product Declaration (HPD) and third-party certified Environmental Product Declaration (EPD) available




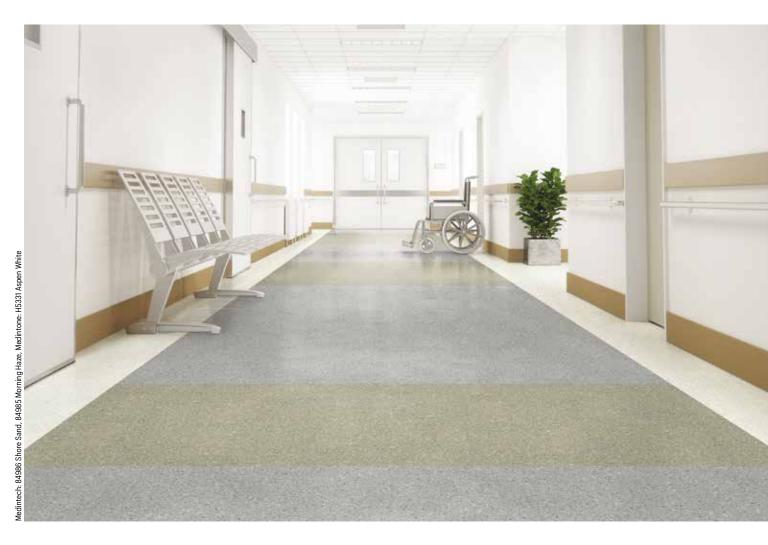


Diamond 10[®] Technology with Enhanced Traction

Diamond 10 Technology is a patented innovation that uses cultured diamonds to provide the ultimate scratch, stain, and scuff resistance. It's a no-polish, easy-to-clean solution that is designed to look beautiful for years to come, despite daily maintenance and rigorous disinfection protocols.

- Provides enhanced traction for an added measure of safety where it matters most achieves R10 Rating per standard DIN 51130
- Protects against scratches, stains, and scuffs for floors that look newer, longer
- Offers ease of maintenance no polishing, stripping, or restorative maintenance required

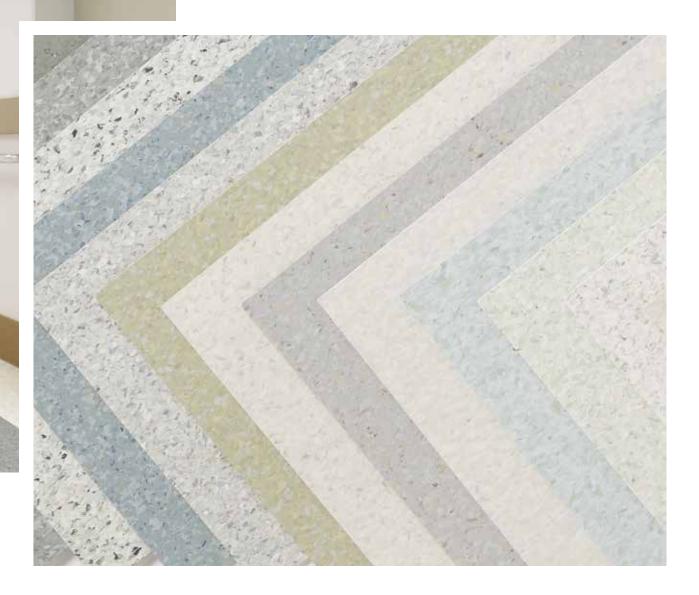



- 1. Diamond 10® Technology with Enhanced Traction
- 2. Through Pattern Wear Layer

10 Year Commercial Limited Warranty

Supported by a 10 Year Commercial Warranty. Add 10 years of overall warranty coverage by using Strong System™ subfloor preparation products. Visit armstrongflooring.com for more information.

Product Information

Construction - Homogeneous Sheet

International Specifications - ASTM F1913

Overall Thickness - 0.080 in. (2.0 mm)

Wear Layer Thickness - 0.080 in. (2.0 mm)

Size - Up to 98.4 ft (30 m) 6 ft. 7 in. (2.0 m)

Factory Finish - Diamond 10® Technology with Enhanced Traction

Installation - Full Spread Adhesive: S-995, Flash Cove Adhesive: S-580,

Seams: Heat Weld or S-761 Seam Adhesive

Maintenance Options - Polish, No Polish - Spray Buff, No Polish - No Buff

Shade may vary from sample.

ArmstrongFlooring

Walk On. Walk Strong.





Visit ArmstrongFlooring.com

for complete Product, Technical, Adhesives, Installation and Maintenance recommendations.

Print#: FP7440F10612-322